

STRETCH HOODER

BestPack's State of the Art Stretch Hooder Allows for an Environmentally Safe, Cost Effective, Energy Saving, and a Convenient Method to Protect your Palletized Products. The Stretch Hooder Film Allows for Safe Transportation and Storage of your Products.







Sold by CBM Systems, Inc.


+ 1 (909) 670-8888 | sales@cbmsystem.com | www.cbmsystem.com

SHC2-54


Machine Footprint:

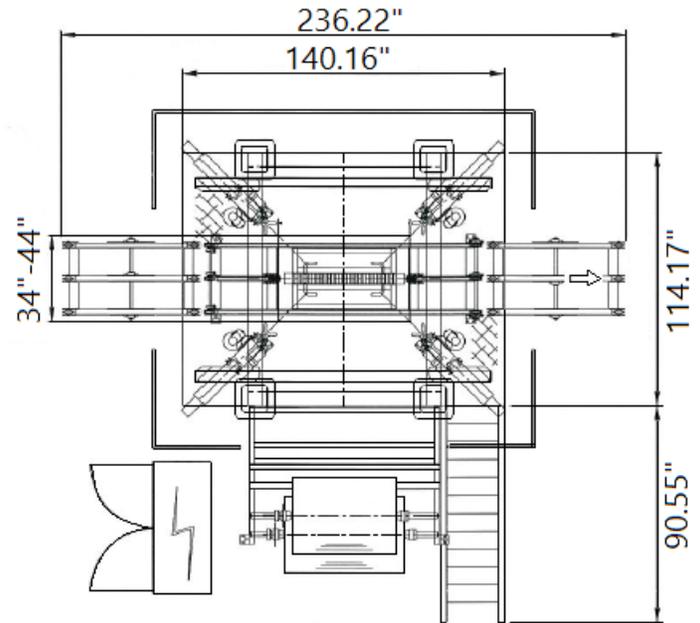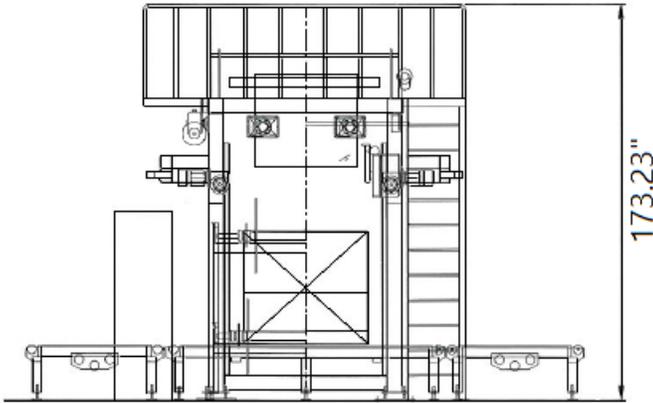


1. Film is opened by vacuum and then retained mechanically.




2. Four film grippers move up into the open film.



3. Film gripper stretch the completed hood to a size of pallet load.



4. The hood is now applied to the pallet load.



5. The film is slowly slipped under the pallet, locking pallet and load together.

Machine Specifications

Production Speed: 40 Loads / Hour Based on Load Configuration

Pallet Load Size: 48" x 40"

Power Consumption: 0.15 kwh Per Pallet

Required Air Pressure: 7 Bar

*Machine Dimension: 236.22" L x 114.17" W x 173.23" H

*Dimension may vary since machine can be custom built to fit diverse film size.

Information subject to change without notice.

© 2016 CBM Systems Inc. All rights reserved.



CBM Systems, Inc.
1599 Monte Vista Ave. Claremont, CA 91711
sales@cbmsystem.com
(909) 670-8888
www.cbmsystem.com

