


AUTOMATIC CONVEYORIZED Heavy Duty Stretch Wrapper

BestPack Automatic ConveyORIZED Heavy Duty Stretch Wrapper with Infeed and Outfeed Conveyors and Requires No Operator.


This Automatic System is Customizable Depending on your Packaging Needs, It is Built with Flexibility, Performance, Reliability and Integrity.

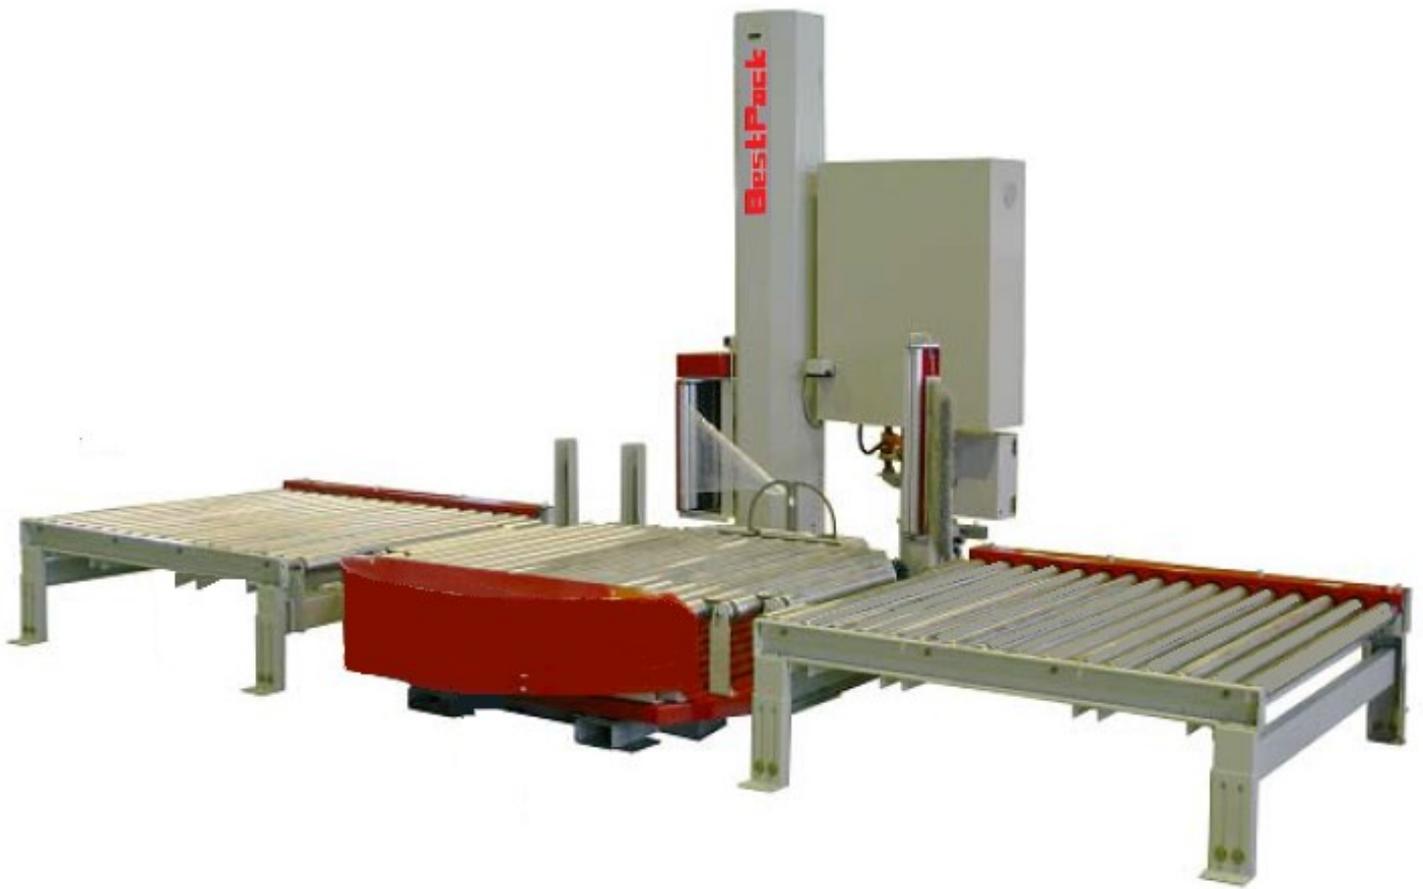

S300-FA

Major Features

Machine Footprint:

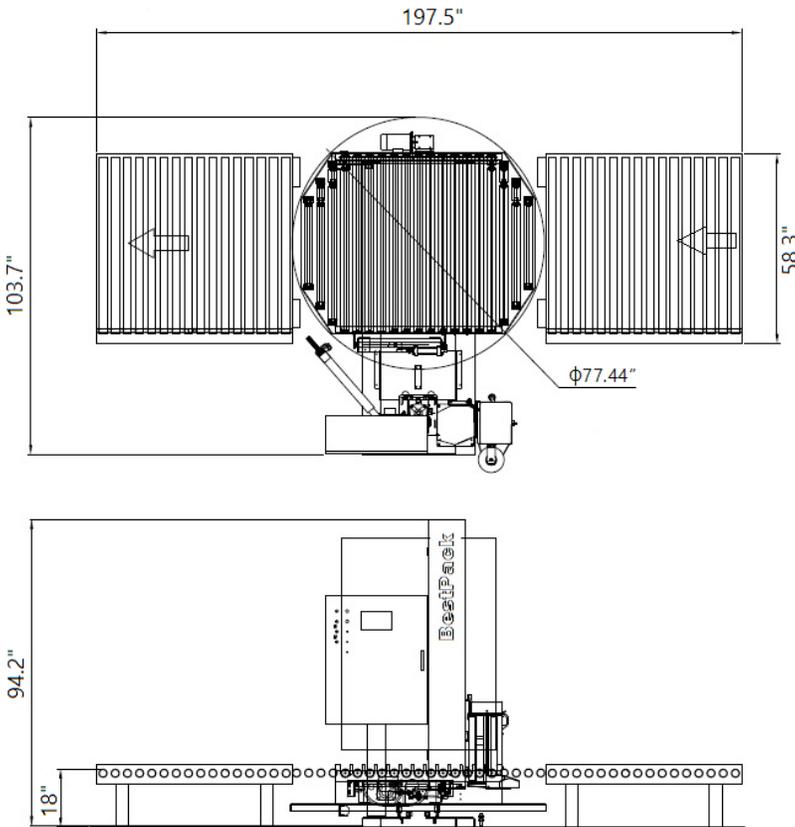

Controls

- ◆ PLC MicroLogix with 24V Control System
- ◆ Auto-Height Sensing Photoeye
- ◆ Current Overload Protection
- ◆ Separate Top and Bottom Wrap
- ◆ Variable Speed 12 RPM
- ◆ Adjustable Film Force to Load Control
- ◆ Touch Screen Operator Interface
- ◆ Electronic Soft Start/Stop
- ◆ Forward and Reverse Conveyor Control

Film Delivery

- ◆ Standard 20" Film Rolls
- ◆ Motorized Pre-Stretch up to 300% other ratio available
- ◆ Safety Door with See Thru Lexan Cover
- ◆ Brush-On Film Tail Treatment
- ◆ Automatic Film Clamping and Cutting

Machine Specifications

Production Speed:	45-50 Loads / Hour Based on Load Configuration
Maximum Load Size:	50" L x 50" W x 80" H
Maximum Load Size:	36" L x 36" W x 10" H
Maximum Load Weight:	4,000 lbs
Air Requirements:	3CFM at 80 PSI
Power Requirements:	230V, 3 Phase, 60Hz, 20 Amp
Estimate Machine Weight:	4,800 lbs

Information subject to change without notice.

©2022 CBM Systems Inc. All rights reserved.



CBM Systems, Inc.
1599 Monte Vista Ave. Claremont, CA 91711
sales@cbmsystem.com
(909) 670-8888
www.cbmsystem.com

